

# ANDES 4013



## CHARACTERISTICS

- Two attachment points with work belt and three automatic buckles
- Two attached textile loops on the chest that must be connected with a karabiner (ordered separately), an extended D-ring (with Velcro) on the back and two D-rings on the side
- Ideally positioned seat strap for better comfort
- Equipped with an NFC chip under the label designed for mapping users and keeping track of inspection schedules
- To be used by persons weighing up to 140 kg (including equipment) and with a length between 170 and 200 cm

**Article number: 8.84.013.01**

## SUITABLE FOR WORK IN, E.G.:

- Scaffolding
- Construction
- Installation technology
- Aerial platforms
- Offshore
- Petrochemicals

## COLOUR

Black/red/grey

## SIZES

L/XL

## OTHER AVAILABLE SIZES

S/M (item number 8.84.013.00)

## PACKAGING

- 1 piece per polybag
- 8 pieces per case

**CE 0598**


EN 361:2002  
EN 358:1999

### ITEM INFORMATION


SIZE	ARTICLE NO.	EAN CODE 1 PIECE (POLYBAG)	EAN CODE 8 PIECES (CASE)
L/XL	8.84.013.01	8718249048999	8718249049002

### USER INSTRUCTIONS AND SAFETY PRECAUTIONS:

The safety harness is a piece of personal protective equipment that should be assigned to a single user (it should only be used by one person at a time). The harness should be adjusted to the size of the user beforehand. It should fit well so that it does not slip and pinch the stomach. Follow the next steps:

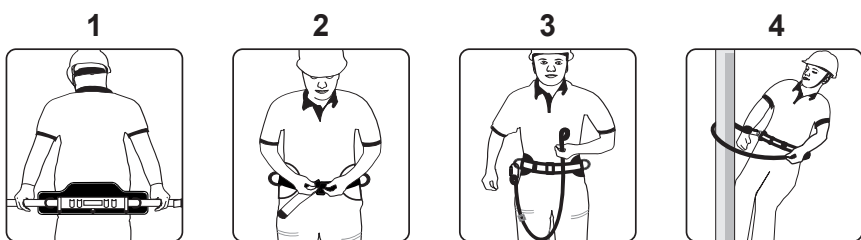

The safety harness is a piece of personal protective equipment that should be assigned to a single user (it must only be used by one person at a time). The harness should be adjusted to the size of the user beforehand. The straps must finally and always be adjusted so that the strap is in place under the buttocks and that the back panel is properly located between the shoulder blades. A harness should be buckled as close to the body as possible, without overdoing it so that the user still has freedom of movement. Follow the next steps:

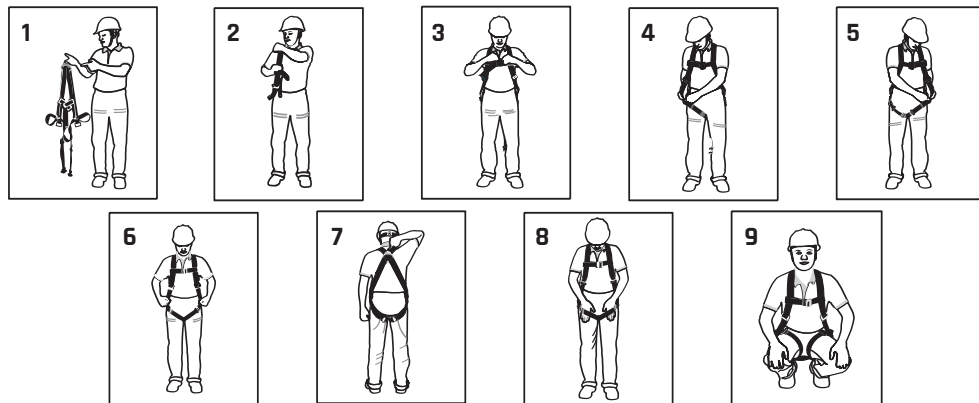

### STORAGE REQUIREMENTS

During transport, keep the belt away from all sharp parts and keep it in its packaging. Clean with soap and water. Wipe with a dry cloth and hang in a ventilated area to allow it to dry naturally and away from any open flame or heat source. This also applies to parts that have become wet during use. Metal parts should be wiped down with a cloth with Vaseline oil. The use of bleach and cleaning detergents is strictly forbidden. The harness should be stored in a dark and ventilated area with a moderate temperature and away from sunlight, heat and chemical products.

### TESTING INSTITUTE

This fall protection is certified by: SATRA Technology Europe Ltd (Notified Body no. 2777), Bracetown Business Park, Clonae, Dublin D15 YN2P, Ireland

### DECLARATION OF CONFORMITY

For a copy of the declaration of conformity, please refer to the following web link: [www.oxxa.work/doc](http://www.oxxa.work/doc)

### RELATED PRODUCTS



#### JURA 4062

Y Fall protection lanyard XL with shock absorber 2.5 m

Article no. 8.84.062.00



#### HELENA 4084

Positioning rope adjustable 2 m

Article no. 8.84.084.00

### YOUR SUPPLIER: